

Part Number	
Project Notes	

## GS Series

**PATENT PENDING**

DIRECT REPLACEMENT LED LAMP for 400W MH

### Features

- Design** Proprietary Direct-Fit EZ Install LED technology for 400W, 350W, 320W, 250W and 175W Metal Halide Lamps  
HO, VHO and VVHO models both upright/downlight and downlight only types. Specify upright for acrylic glass domes.
- Mounting** Direct screw in replacement for mogul sockets, uses existing MH magnetic ballast. For vertical mogul sockets, E39, EX39 and E40 lamp base. Compatible with pulse start and probe start Metal Halide ballasts. Designed for open fixtures only.
- Efficiency** Up to 115Lm/W. Saves 50% on energy costs over Metal Halide Lamps
- Color Temp.** 5000°K. 83 CRI minimum. 4000°K available upon request
- Safety** Instant on/off, no arc tube re-strike timeout
- Output** Up to 28,500 Lumens
- Lifespan** L70: 60,000 hours
- Warranty** 5-year warranty
- Certification** UL listed, LM-80 & LM-79 reports available, \*LDL qualified on select products
- Weight** GS Series: 2.3lbs
- Environmental** Ambient Temperature: -20C to +55C (open fixtures only)  
Relative Humidity: 15% to 85%, non-condensing



**Uplight/Downlight  
GS-400U-VHO shown**

### Specifications

BALLAST	400W			350W			320W			250W			175W		
	PART #	TOTAL LUMENS	LAMP WATTS	LM/WT	TOTAL LUMENS	LAMP WATTS	LM/WT	TOTAL LUMENS	LAMP WATTS	LM/WT	TOTAL LUMENS	LAMP WATTS	LM/WT	TOTAL LUMENS	LAMP WATTS
GS-400U-HO-850*	21,000Lm**	205W	102Lm/W	18,000Lm**	170W	106Lm/W	17,000Lm**	160W	106Lm/W	15,000Lm**	125W	120Lm/W	9,800Lm**	85W	115Lm/W
GS-400U-VHO-850*	24,000Lm**	210W	114Lm/W	21,000Lm**	180W	106Lm/W	20,000Lm**	170W	118Lm/W	17,000Lm**	130W	131Lm/W	11,000Lm**	90W	122Lm/W
GS-400D-VVHO-850*	26,000Lm	230W	113Lm/W	23,400Lm	180W	117Lm/W	21,900Lm	190W	115Lm/W	19,000	145W	131Lm/W	12,500Lm	100W	125Lm/W
GS-400U-VVHO-850*	28,500Lm	260W	111Lm/W	26,250Lm	225W	117Lm/W	23,920Lm	205W	117Lm/W	20,000Lm	165W	121Lm/W	14,225Lm	110W	129Lm/W


\* LDL Qualified \*\*Total lumens is 7% up-light, 93% down-

### Ordering Information

Example: **GS-400U-HO-850**

SERIES	TYPE	OUTPUT	CRI	CCT
GS – GS Series	<b>400U</b> – 400U Metal Halide LED Retrofit - upright/downlight	<b>HO</b> – High Output <b>VHO</b> – Very High Output	<b>8</b> – >80	<b>50</b> – 5000°K
GS – GS Series	<b>400D</b> – 400D Metal Halide LED Retrofit - all downlight	<b>VVHO</b> – Very Very High Output	<b>8</b> – >80	<b>50</b> – 5000°K

### Product Dimensions

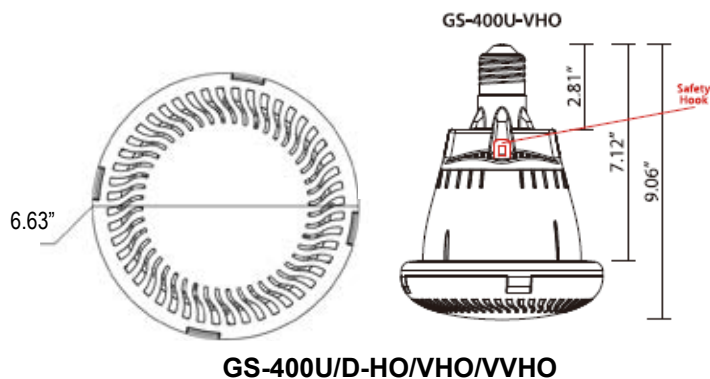

**GS-400U/D-HO/VHO/VVHO**