

T8 LED Tube

Type A- Ballast Driven

Feature

- Compatibility:** Plug & play replacement T8 fluorescent lamps.
Directly replaces 32W,30W,28W,25W T8 lamps.
- Mounting:** G13 lamp base.
- Color Temp.:** 3000°K/3500°K/4000°K/5000°K. 83 CRI
- Output:** Up to 2,200 Lumens
- LifespanL70:** 50,000 hours
- Warranty:** 5-year warranty
- Certification:** UL listed
- Weight:** 0.45lbs per lamp
- Environmental:** Ambient Temperature: -40C to +40C
Relative Humidity: Dry and Damp



Ordering Information


Example: **T8-2FT-1250LM-8W-TA-850**

SOCKET TYPE	DIMENSION	LUMEN PACKAGE	LAMP WATTS	TYPE	KELVIN
T8	2 Ft*	1250	8W	TA= Type A Electronic Ballast Compatible	830=3000K
	3 Ft	1450	10W		835=3500K
	4 Ft*	1800	11W		840=4000K
	4 Ft*	2200	15W		850=5000K

UL/DLC MODEL NUMBER
T8L-IDDM13-1250-2FT-CBA
N/A
T8L-IDDM13-1800-4FT-EBA
T8L-IDDM13-2200-4FT-EBA

*DLC V4.0 listed

Product Dimensions:

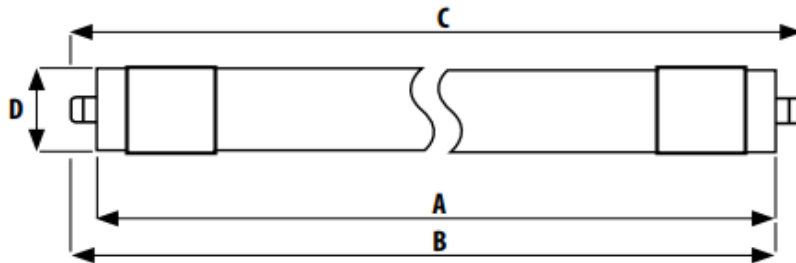

4 Ft tube

Dimension	Min	Max	Unit
A	/	1199.4	mm
B	1204	1206.5	
C	1210.8	1213.6	
D	25	26	

3 Ft tube

Dimension	Min	Max	Unit
A	/	894.6	mm
B	899.3	901.7	mm
C	/	908.8	mm
D	25.0	26.0	mm

2 Ft tube

Dimension	Min	Max	Unit
A	/	589.8	mm
B	594.5	596.9	
C	601.2	604	
D	25	26	

Application Notes

Conditions that may void warranty coverage:

- Used with line voltage, LED driver or incompatible ballast.
- Used with fluorescent sockets which are cracked, dirty, broken or in undesirable condition.
- Used in wet areas.
- Improper ballast wiring(i.e. 4 lamp ballast operating 2 lamps)

For ballast compatibility list contact Foreverlamp at 310-320-8811.